SKS501i

FORGED BRASS BALL VALVE WITH LOCKABLE HANDLE ,ISI MARKED

Product Data



Features

- Forged Brass Body & Ball
- Lockable Handle
- ISI Marked - IS:19315
- Made In India
- PN25
- Self Locking Nylon Nut


SKS Valves are backed by years of accumulated & all round experience, combined with the use state of the art materials & production resources. “SKS” - products are carefully planned at every stage of concept, design & construction. The quality integration from the raw materials up to the stage of final product guarantees the “SKS” - valve quality.


All “SKS” - Valves OUT-PERFORM any of our competitor’s owing to better design & technical features.

SKS501i


FORGED BRASS BALL VALVE WITH LOCKABLE HANDLE ,ISI MARKED

Product Data

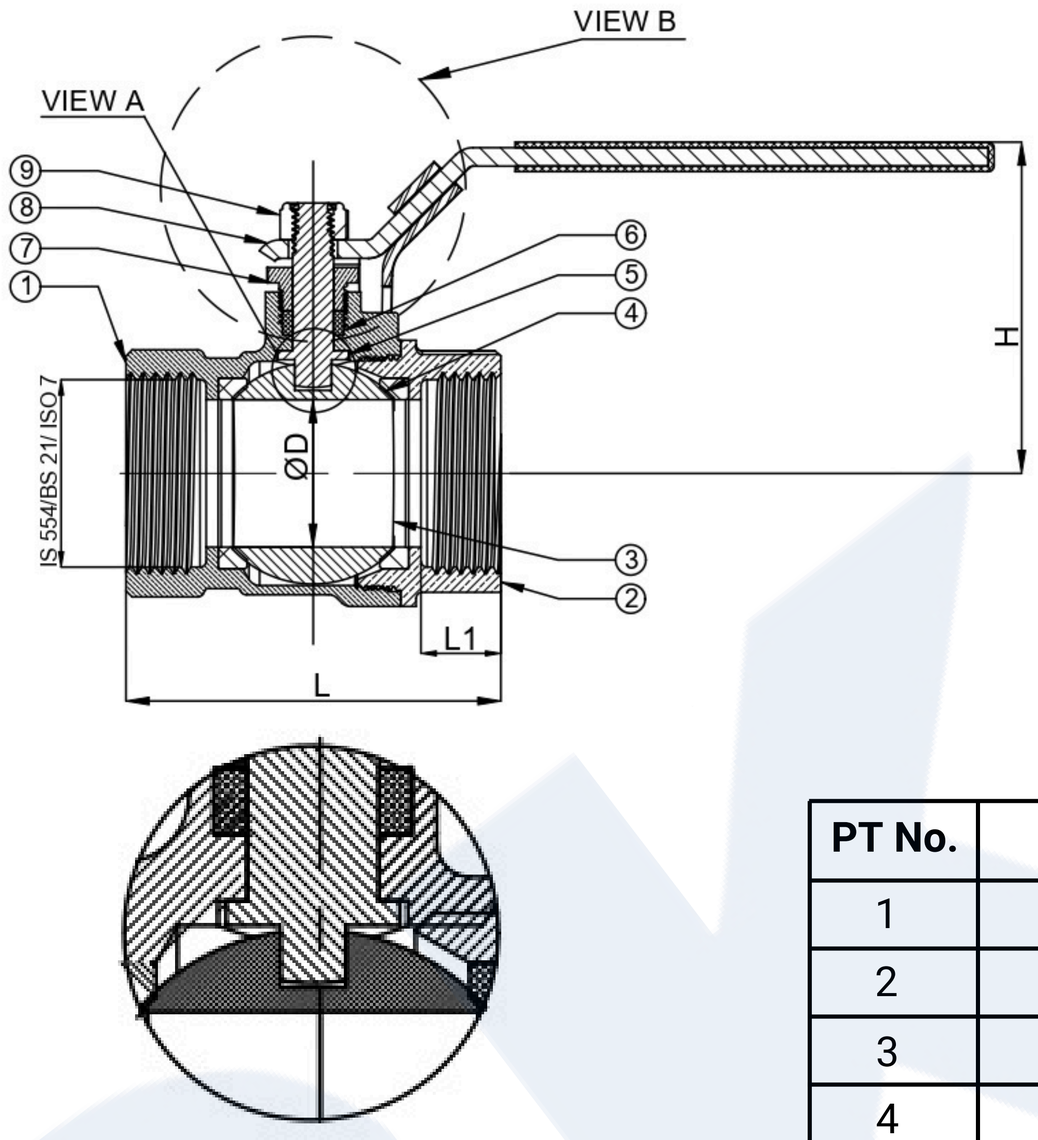

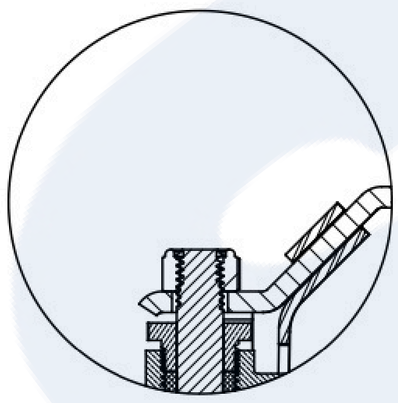

VIEW B
DETAILS VIEW OF
LOCKABLE HANDLE

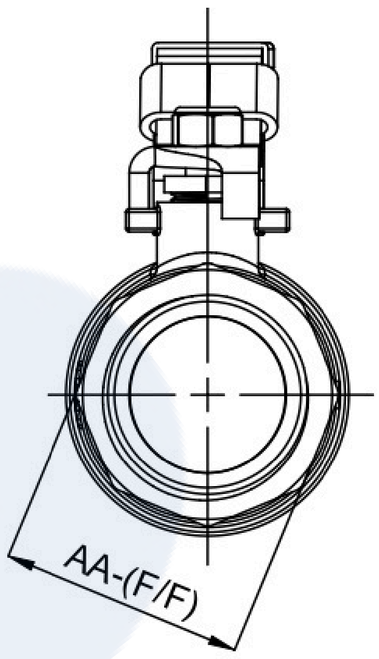

VIEW A
ANTI-BLOW OUT STEM DESIGN

PT No.	PART NAME	MATERIAL	QTY.
1	Body	IS:6912 GR. FLB (Forged Brass) + Nickel Plated	1
2	Bonnet		1
3	Ball	Forged Brass (Chrome Plated)	1
4	Seat	PTFE (VIRGIN PTFE Gr.220)	2
5	Stem	IS:6912 GR. FLB	1
6	Gland Packing	PTFE (VIRGIN PTFE Gr.220)	1
7	Gland	IS:6912 GR. FLB	1
8	Handle With Lock	Steel - Nickel Plated	1
9	Nut	ASTM A 194 Gr. 8 TYPE SS304	1

HYDROSTATIC TEST PRESSURE	
BODY (Bar)	SEAT (Bar)
37.5	27.5

SIZE	RATING	L±3	L1±3	ØD±1	H±10	AA±2
1/2"	PN25	52	13	14.5	52	24.8
3/4"	PN25	57	13	19	52	30.5
1"	PN25	63	13	24	63	37.8
1-1/4"	PN25	78	16	30.4	75	45.5
1-1/2"	PN25	87	16	38	82	51.5
2"	PN25	102	16	47	82	64.5

NOTE:

1. BORE OF VALVE SHALL BE FULL BORE.
2. MARKING OF PN & DN WILL BE FORGED ON BODY.
3. VALVE SHALL HAVE ANTI BLOW OUT STEM.
4. END CONNECTION WILL BE IN SCREWED FEMALE BSP PARALLEL THREAD.
5. COMPLY AS PER IS:19315
6. TEMPERATURE RANGE : -10°C TO 120°C
7. SKS FORGED BRASS BALL VALVE WITH LOCKABLE HANDLE, ISI MARKED

ALL DIMENSIONS ARE IN MM UNLESS OTHERWISE STATED. UNSPECIFIED TOLERANCES ACCORDING TO IS:2102(MEDIUM)

DUE TO CONTINUOUS DEVELOPMENT, WE RESERVE THE RIGHTS TO CHANGE ANY DIMENSIONS WITHOUT ANY PRIOR NOTICE